



POWERREX SL12000



**4 post 12 ton lift with two jacks
for wheel free operation**

Feature

- Extended platform for convenient working condition
- Auto level locking position
- Double safety devices make safe working condition
- Engineering plastic carriage guide
- Automatic Electrical Locking System
- Cable remote control included (6 buttons)
- Adopted twin wire ropes
- Individual control switch on each rolling jack




Dimension

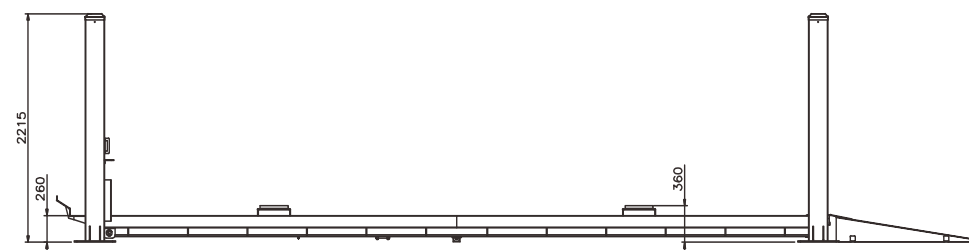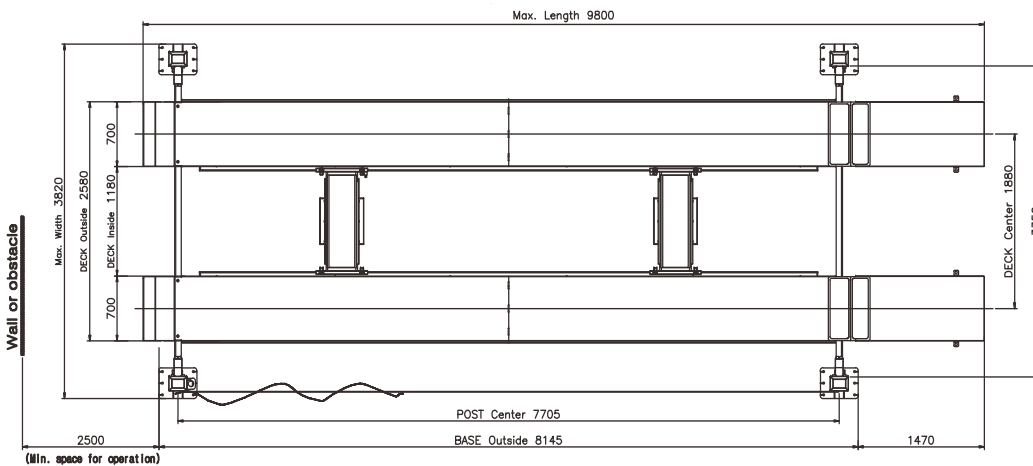

Specification

Max.(Capacity)	Main	12,000kg
	Jack	6,000kg
Max.Lifting Height	Main	1750 mm
	Jack	660mm
Lowest Height	Main	260 mm
	Jack	360mm
Size(mm)	3,820 W X 2,215 H X 9,800 L(mm)	
Lifting Time	Main	45~65 sec.
	Jack	10~20 sec.
Lowering Time	Main	30~45 sec.
	Jack	35~50 sec.
Power & Motor	3phase 5HPx5Px380Vx60Hz	
Operation method	Control panel / wired remote control type	

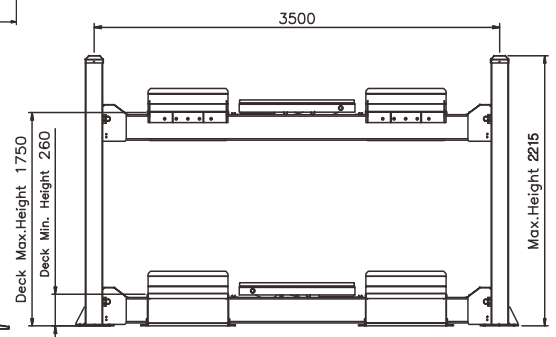

INTEREQUIP
INTEREQUIP PTY LTD.

www.interequip.com.au
E-mail: info@interequip.com.au
TEL: Australia 18000EQUIP (1800 037 847)